

 TECHNICAL DATA SHEET ISO	Number	SL-TE-WI-087
	Version	A/1
	Page/Total	1/4

Product Name: PVB

Product features

Polishable material

Basic colors and transparent color series

Main applications:

Decorative items, toys, accessories, figurines, and lighting fixtures.

Points for attention:

Properties	Test Method	Test Condition	S.I. Units	Typical Values
Mechanical				
(X-Y) Tensile Strength	ISO 527/2	50 mm/min	MPa	48±5
(X-Y) Young's Modulus	ISO 527/2	1 mm/min	MPa	/
(X-Y) Elongation at break	ISO 527/2	50 mm/min	%	14±3
(X-Y) Flexural Strength	ISO 178	2 mm/min	MPa	78±6
(X-Y) Flexural Modulus	ISO 178	2 mm/min	MPa	2250±200
(X-Y) Izod Impact Strength of Notched Specimen	ISO 180	23℃	KJ/m ²	6.5±2
(Z-X) Izod Impact Strength of Unnotched Specimen	ISO 180	23℃	KJ/m ²	6±2
Shore Hardness	ISO 868	23℃	HA/HD	82.5
Thermal				
(X-Y) Heat Distortion (HDT)	ISO 75	0.45 MPa	℃	55.8±3
Glass Transition (Tg)	ISO 11357-2	10 ℃/min	℃	70
Melting Temperature	ISO 11357-3	10 ℃/min	℃	/
@5%Decomposition Temp.	ISO 11358	20 ℃/min	℃	≥230
Vicat Softening Temp.	ISO 306	5kg, 50℃/h	℃	60
Moulding Shrinkage	ISO 294	23℃	%	0.5-1.0
Coefficient of Thermal Exp.	ISO 11359-2		μm (m ·℃)	3.51×10-4
Others				
Melt Mass-flow Rate	ISO 1133	210℃/2.16 kg	g/10 min	14.3±2
Density	ISO 1183	23℃	g/cm ³	1.08
Volume Resistivity	IEC 60093	-	ohm-cm	1.00E+15
Permittivity	IEC 60250	1 kHz		3.1
Flammability	UL 94	1.5 mm	Class	HB
Chemical				
Item		Class		
Weak Acid (pH 3-6)		/		

SUNLU	Number	SL-TE-WI-087
TECHNICAL DATA SHEET ISO	Version	A/1
	Page/Total	2/4

Strong Acid (pH<3)	/
Weak Bases (pH 8-10)	/
Strong Bases (pH >10)	/
Deionized Water	Good
Alcohol	Bad
Ketone	Bad
Petroleum Fuels	Normal
Ester	Bad


Grade: Excellent、Good、Normal、Bad

Recommended Printing Parameters

Parameters	Range	
Nozzle Temp.	Temperature °C	Speed mm/s
	200-210	50-100
	210-230	100-200
Plate Temp.	50-60°C	
Plate Material	Standard	
Plate Treatment	No processing required	
Cooling Fan	Open ☒ /Close ☐	
Raft Distance	0.2-0.4mm	
Retraction Distance	0.8-1.2mm	
Retraction Speed	30-40mm/s	
Room Temp.	Room Temperature	
Supported Material	PVA	
Drying Temp.	50°C	



The above values are provided for printer reference only. The parameters may be appropriately adjusted according to different printer models, printed objects, and specific application requirements.

TENSILE TESTING SPECIMEN


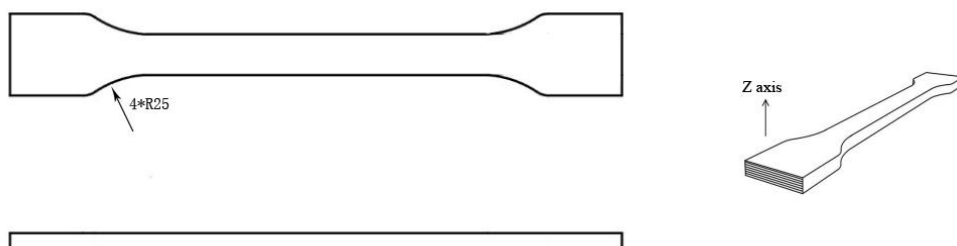


 TECHNICAL DATA SHEET ISO	Number	SL-TE-WI-087
	Version	A/1
	Page/Total	3/4

FLEXURAL TESTING SPECIMEN



IMPACT TESTING SPECIMEN

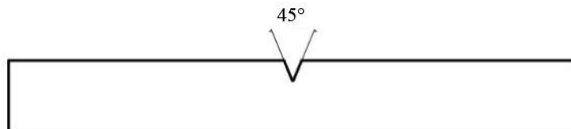

Note:

[1] Test specimens were printed at a printing speed of 45mm/s and a printing temperature of 240 °C. Infill: 100%, with a 90° raster orientation.

[2] The typical values represent average laboratory data and are provided for reference only. They do not constitute product specifications. Results may vary depending on different printers.

Safety and Handling Precautions

A Material Safety Data Sheet (SDS) for this product is available from your local Sunlu office.

The SDS provides customers with information on material handling, safety and disposal, as well as the requirements of applicable local health and safety regulations. The following are general precautions and apply only to the resins supplied. The various additives and processing aids used in plastics moulding and other materials used in secondary

processes have their own safety requirements and must be understood separately.

This product has extremely low toxicity, and under normal conditions of use, there are no particular issues with inhalation, eye contact, or skin contact. However, care must be taken when handling, storing, using or disposing of these resins. Workplace should be kept clean to avoid dust accumulation. Contact with molten resins during processing operations should be minimized. Plastic resin products generate dust and gases during the manufacturing process. Dust

 TECHNICAL DATA SHEET ISO	Number	SL-TE-WI-087
	Version	A/1
	Page/Total	4/4

generated during operations such as sawing, filing and sanding of printed parts may irritate the eyes and upper respiratory tract. In dusty manufacturing environments, it is recommended that operators use respirators or masks approved by the appropriate authorities.

The print processing area should be well ventilated as required by proper operating procedures. When plastics are processed above the melting temperature, fumes containing decomposing substances are released and may be irritating. In most cases, good general ventilation equipment is sufficient. Local extract ventilation should be used when necessary. When there is a risk of eye injury from airborne

particles during work, protective goggles should be worn. If necessary, wear insulated gloves for protection when handling the resin.

The product may yellow under the action of ultraviolet light, so it should be stored away from direct sunlight.

Users are advised to investigate the final use of their product beforehand to ensure the correct use of Sunlu products. To prevent misuse or incorrect use of Sunlu products, it is advisable to contact the Sunlu R&D department or the marketing department.

Note: Due to variations in usage conditions and applicable laws by location and time, customers are responsible for determining whether the products and product information in this document are suitable for their use. Customers should ensure that their workspaces and handling methods comply with applicable laws and other government regulations. Sunlu assumes no responsibility or liability for the information in this document and does not provide any warranties. All implied warranties of merchantability or fitness for a particular purpose under this document are hereby expressly excluded.



Safety Data Sheet(SDS)

According to GHS

Product name: PVB filament

Prepared by GB/T 16483 and GB/T 17951

Revision date: 2023.12.6

SDS Number: SLFDM2312060

Initial date: 2023.12.6

Version: 1.0

Section 1 - Identification of the substance/preparation and of the company/undertaking

Product identifier

Product name: PVB filament

Relevant identified uses of the substance or mixture and uses advised against

Details of the supplier of the safety data sheet

Manufacture/Supplier : Zhuhai SUNLU Industrial Co., Ltd.

Address: Room 501C, Building 2 No.35 Jinzhou Road, Tianjiawan Town, High-tech District, Zhuhai Guangdong China.

Tel: (086) 0756 3385639

E-mail : jk@sunlugw.com

Fax : (086)0756 3385639

Further information obtainable from: Zhuhai SUNLU Industrial Co.,Ltd

Section 2 - Hazards Identification

	Min	Max
Flammability	3 	0=Minimum
Toxicity	0	1=Low
Body Contact	0	2=Moderate
Reactivit	2 	3=High
Chronic	0	4=Extreme

GHS classification

Not Applicable

Label elements:

GHS label elements

Not Applicable

SIGNAL WORD:

Not Applicable

Product name: PVB filament

SDS Number: SLFDM2312060

Revision Date: 2023.12.6

Section 3 –Composition/Information on Ingredients

Ingredient Name	CAS No.	EC No.	Content (%)
Polyvinyl butyral	63148-65-2	613-158-6	98
Sorbitol	50-70-4	200-061-5	2
Irganox1010	6683-19-8	-	0.2

Section 4 - First Aid Measures

INGESTION

- Immediately give a glass of water.
- First aid is not generally required. If in doubt, contact a Poisons Information Centre or a doctor.

EYE

If this product comes in contact with eyes:

- Wash out immediately with water.
- If irritation continues, seek medical attention.
- Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.

SKIN

If skin or hair contact occurs:

- Flush skin and hair with running water (and soap if available).
- Seek medical attention in event of irritation.

Inhalation

- If fumes, aerosols or combustion products are inhaled remove from contaminated area.
- Other measures are usually unnecessary.

Indication of any immediate medical attention and special treatment needed

- Treat symptomatically.

Section 5 - Firefighting Measures

EXTINGUISHING MEDIA

- Foam.
- Dry chemical powder.
- BCF (where regulations permit).
- Carbon dioxide.

FIRE FIGHTING

- Alert Fire Brigade and tell them location and nature of hazard.
- Wear breathing apparatus plus protective gloves.

Product name: PVB filament

SDS Number: SLFDM2312060

Revision Date: 2023.12.6

- Prevent, by any means available, spillage from entering drains or water courses.
- Use water delivered as a fine spray to control fire and cool adjacent area.

FIRE/EXPLOSION HAZARD

- Combustible solid which burns but propagates flame with difficulty.
- Organic powders when finely divided over a range of concentrations regardless of particulate size or shape and suspended in air or some other oxidizing medium may form explosive dust-air mixtures and result in a fire or dust explosion (including secondary explosions).

FIRE INCOMPATIBILITY

- Avoid contamination with oxidising agents i.e. nitrates, oxidising acids, chlorine bleaches, pool chlorine etc. as ignition may result.

Section 6 –Accidental Release Measures

MINOR SPILLS

- Generally not applicable

MAJOR SPILLS

- Generally not applicable

Personal Protective Equipment advice is contained in Section 8 of the SDS.

Section 7 - Handling and Storage

PROCEDURE FOR HANDLING

- Limit all unnecessary personal contact.
- Wear protective clothing when risk of exposure occurs.
- Use in a well-ventilated area.
- Avoid contact with incompatible materials.
- Store in original containers.
- Keep containers securely sealed.
- Store in a cool, dry, well-ventilated area.

SUITABLE CONTAINER

- Polyethylene or polypropylene container.
- Check all containers are clearly labelled and free from leaks.
- Packing as recommended by manufacturer.

STORAGE INCOMPATIBILITY

Avoid contamination of water, foodstuffs, feed or seed.

- Avoid reaction with oxidising agents

Section 8 - Exposure Controls, Personal Protection

EXPOSURE CONTROLS

Appropriate engineering controls

Engineering controls are used to remove a hazard or place a barrier between the worker and the hazard. Well-designed engineering controls can be highly effective in protecting workers and will typically be independent of worker interactions to provide this high level of protection.

The basic types of engineering controls are:

Process controls which involve changing the way a job activity or process is done to reduce the risk.

Enclosure and/or isolation of emission source which keeps a selected hazard "physically" away from the worker and ventilation that strategically "adds" and "removes" air in the work environment.

Personal protection



Eye and face protection

- Safety glasses with side shields.
- Chemical goggles.
- Contact lenses may pose a special hazard; soft contact lenses may absorb and concentrate irritants. A written policy document, describing the wearing of lenses or restrictions on use, should be created for each workplace or task.

Skin protection

See Hand protection below

Hands/feet protection

The selection of suitable gloves does not only depend on the material, but also on further marks of quality which vary from manufacturer to manufacturer. Where the chemical is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

The exact break through time for substances has to be obtained from the manufacturer of the protective gloves and has to be observed when making a final choice.

Suitability and durability of glove type is dependent on usage.

Body protection

See Other protection below

Other protection

- Overalls.
- P.V.C. apron.
- Barrier cream.

Product name: PVB filament

SDS Number: SLFDM2312060

Revision Date: 2023.12.6

Section 9 - Physical and Chemical Properties

Information on basic physical and chemical properties

Odour	Odorlessness
Form	Solid
Melting Range (°C)	90-130
Boiling Range (°C)	No data
Flash Point (°C)	No data
Decomposition Temp (°C)	No data
Autoignition Temp (°C)	No data
Upper Explosive Limit (%)	No data
Lower Explosive Limit (%)	No data
Volatile Component (%vol)	No data
Solubility in water (g/L)	Insoluble in water
p H (1% solution)	No data
p H (as supplied)	No data
Print Temp (°C)	200-210
Bed Temp(°C)	50-65
Density(g/cm³)	1.08-1.10
Heat Distortion Temp (°C,0.45MPa)	/
Melt Flow Index (g/10min)	11 (210°C/2.16kg)
Tensile Strength (MPa)	53
Elongation at Break (%)	30
Flexural Strength (MPa)	63
Flexural Modulus (MPa)	1600
IZOD Impact Strength (kJ/m²)	4.5

Section 10 - Stability and Reactivity

Reactivity

See section 7

Chemical stability

- Unstable in the presence of incompatible materials.
- Product is considered stable.
- Hazardous polymerisation will not occur.

Section 11 - Toxicological Information

Information on toxicological affects

Acute Toxicity

LD/LC50 values relevant for classification

Product name: PVB filament

SDS Number: SLFDM2312060

Revision Date: 2023.12.6

No data.

Primary irritant effect

On the skin

No data.

On the eyes

No data.

Inhaled

No data.

Sensitization: No data.

Section 12 - Ecological Information

Ingredient	Persistence:Water/Soil	Persistence: Air	Bioaccumulation	Mobility
Polyvinyl Alcohol	LOW	LOW	LOW	LOW
Sorbitol	LOW	LOW	LOW	LOW
Irganox1010	No Data available	No Data available No	Data available	No Data available

Section 13 - Disposal Considerations

Legislation addressing waste disposal requirements may differ by country, state and/ or territory. Each user must refer to laws operating in their area. In some areas, certain wastes must be tracked. A Hierarchy of Controls seems to be common - the user should investigate:

- Reduction
- Reuse
- Recycling
- Disposal (if all else fails)

This material may be recycled if unused, or if it has not been contaminated so as to make it unsuitable for its intended use.

Section 14 - Transport Information

Labels Required

Marine Pollutant: NO

NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS: ADR, IATA, IMDG,ADN

Section 15 - Regulatory Information

REGULATIONS

The product needs to follow local regulations.

Section 16 - Other Information

This information is based on our present knowledge. However, this shall not constitute a guarantee for

Product name: PVB filament

SDS Number: SLFDM2312060

Revision Date: 2023.12.6

any specific product features and shall not establish a legally valid contractual relationship.

***End ***